
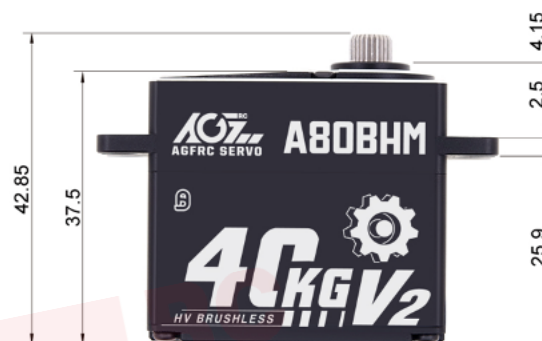


A80BHM V2

Control System	PWM		
Refresh Rate	333 Hz / 666Hz		
Neutral Position	1520 μ Sec / 760 μ Sec		
Signal Mode	Digital		
Dead band	2 μ Sec		
Operating Voltage	4.8V ~ 8.4V		
Operating Temp.	-15°C ~ +70°C		
Bearing	3BB		
Mechanical Angle	220°		
Dimension	40 x 20 x 37.5 mm		
Net Weight	80 g		
Connector / Cable	TYU 300mm / 22AWG		
Operating Travel	180° $\pm$ 10°		
Signal Range	500 to 2500 μ Sec		
Operating Speed	Stall Torque	Unload Current	Loading Current
0.140 sec/60° @ 4.8V	27 kg-cm (375 oz-in) @ 4.8V	280mA @ 4.8V	3600mA @ 4.8V
0.120 sec/60° @ 6.0V	31 kg-cm (430 oz-in) @ 6.0V	320mA @ 6.0V	4000mA @ 6.0V
0.100 sec/60° @ 7.4V	36 kg-cm (500 oz-in) @ 7.4V	360mA @ 7.4V	4300mA @ 7.4V
0.085 sec/60° @ 8.4V	40 kg-cm (556 oz-in) @ 8.4V	400mA @ 8.4V	4600mA @ 8.4V
Direction	CCW	Motor Type	Brushless
Waterproof Level	IP67	Angle Sensor	Potentiometer
Programmable	Yes	Motor Drive	FET Drive
Gear Material	Strength Steel	Horn Gear Spline	25T- $\varnothing$ 5.92mm
Case Material	Aluminum	Bearing Material	Metal
Wire Color (- + S)	Negative: Black Positive: Black Signal: Grey		
Default Accessories	① 1 pc x 25T-$\varnothing$5.92mm L=45mm Plastic Horn ② 1 pc x 25T-$\varnothing$5.92mm L=40.3mm Plastic Horn ③ 1 pc x 25T-$\varnothing$5.92mm L=27.5mm Plastic Horn ④ 4 pcs x M3*12mm Screws ⑤ 1 pc x M3*8mm Screw ⑥ 4 pcs x 9*6.9*5.6mm ($\varnothing$3) Rubber Pads ⑦ 4 pcs x $\varnothing$6*$\varnothing$3.5*$\varnothing$5mm Copper Sleeves 		

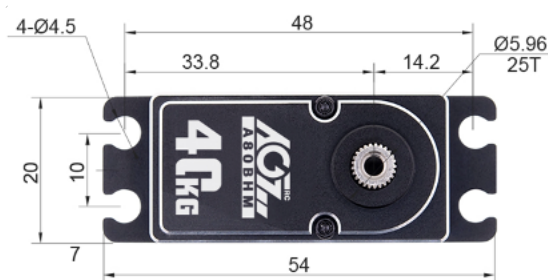

UNIT:MM

Remark: If you have any questions about the A80BHM V2 servo, please contact shopping@agfrc.com directly.