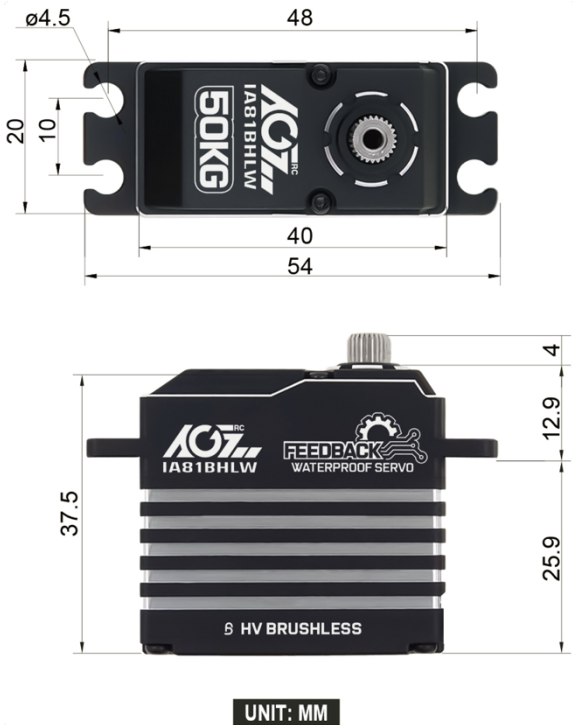


IA81BHLW

Control System	Pulse width modulation control		
Refresh Rate	333Hz		
Neutral Position	1520 μ S		
Signal Mode	Digital		
Dead band	2 μ Sec		
Operating Voltage	4.8V ~ 8.4V		
Operating Temperature	-15C° ~ +70C°		
Bearing	3BB		
Mechanical Angle	No Limit		
Size	40*20*37.5mm		
Net Weight	81g		
Wire	JR 2.54*4Pin 300mm / 22AWG		
Operating Travel	180° $\pm$ 10°		
Signal Range	500 to 2500 μ Sec		
Stall Torque	30 kg-cm (417 oz-in) @ 4.8V 37 kg-cm (514 oz-in) @ 6.0V 44 kg-cm (612 oz-in) @ 7.4V 50 kg-cm (695 oz-in) @ 8.4V	Unload Current	280mA @ 4.8V 320mA @ 6.0V 360mA @ 7.4V 400mA @ 8.4V
Operating Speed	0.180sec/ 60° @ 4.8V 0.150sec/60° @ 6.0V 0.135sec/60° @ 7.4V 0.120sec/60° @ 8.4V	Loading Current	3600mA @ 4.8V 4000mA @ 6.0V 4300mA @ 7.4V 4600mA @ 8.4V
Direction	☒ CCW ☐ CW		
Waterproof Level	☐ IP65 ☒ IP67		
Angle Sensor	☐ Potentiometer ☒ Magnet Angle Sensor		
Motor Type	☒ Brushless ☐ Coreless ☐ DC		
Motor Drive	☒ FET Drive ☐ IC Drive ☐ Transistor Drive		
Programmable	☒ Yes ☐ No		
Gear Material	☒ Strength Steel ☐ Titanium ☐ Copper ☐ Plastic		
Horn Gear Spline	☒ 25T- ϕ 5.92mm ☐ 25T- ϕ 4.94mm ☐ Other _____		
Case Material	☒ AL6061T6 ☐ Aluminum + Plastic ☐ Plastic		
Bearing Material	☒ Metal ☐ Plastic		
Horn Accessories	☒ AL6061T6 ☐ Plastic		
Wire Color	Negative: ☒ Black ☐ Brown Positive: ☐ Black ☒ Red Control Signal: ☐ Grey ☒ White ☐ Orange Position Signal: ☐ Black ☐ White ☒ Orange		