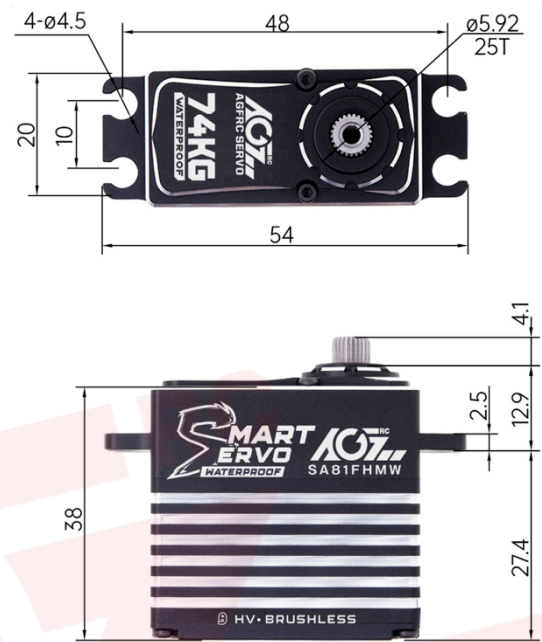


SA81FHMW

Control System	PWM		
Refresh Rate	333 Hz		
Neutral Position	1520 μ Sec		
Signal Mode	Digital		
Dead band	2 μ Sec		
Operating Voltage	4.8V ~ 8.4V		
Operating Temp.	-15°C ~ +70°C		
Bearing	4BB		
Mechanical Angle	No Limit		
Dimension	40 x 20 x 38 mm		
Net Weight	85 g		
Connector / Cable	TYU 300mm / 22AWG		
Operating Travel	180° $\pm$ 10°		
Signal Range	500 to 2500 μ Sec		
Stall Torque	45 kg-cm (625 oz-in) @ 4.8V 55 kg-cm (764 oz-in) @ 6.0V 65 kg-cm (903 oz-in) @ 7.4V 74 kg-cm (1028 oz-in) @ 8.4V	Unload Current	460mA @ 4.8V 500mA @ 6.0V 540mA @ 7.4V 580mA @ 8.4V
Operating Speed	0.190 sec/60° @ 4.8V 0.165 sec/60° @ 6.0V 0.135 sec/60° @ 7.4V 0.125 sec/60° @ 8.4V	Loading Current	5000mA @ 4.8V 5800mA @ 6.0V 6800mA @ 7.4V 7400mA @ 8.4V
Direction	CCW	Motor Type	4-Pole Brushless
Waterproof Level	IP67	Angle Sensor	Magnetic Angle
Programmable	Yes	Motor Drive	FET Drive
Gear Material	Strength Steel	Horn Gear Spline	25T- $\varnothing$ 5.92mm
Case Material	Aluminum	Bearing Material	Metal
Wire Color (- + S)	Negative: Black Positive: Black Signal: Grey		
Default Accessories	① 1 pc x 25T- $\varnothing$ 5.92mm L=45mm Plastic Horn ② 1 pc x 25T- $\varnothing$ 5.92mm L=40.3mm Plastic Horn ③ 1 pc x 25T- $\varnothing$ 5.92mm L=27.5mm Plastic Horn ④ 2 pcs x M2*8mm Screws ⑤ 1 pc x M3*8mm Screw ⑥ 4 pcs x M3*12mm Screws ⑦ 4 pcs x 9*6.9*5.6mm Rubber Pads ⑧ 4 pcs x $\varnothing$ 6* $\varnothing$ 3.5*5mm Copper Sleeves		

Remark: If you have any questions about the SA81FHMW servo, please contact shopping@agfrc.com directly.